

Tel +49 (0) 831 / 960 398-0 Fax +49 (0) 831 / 960 398-10 E-mail: <u>info@kombitec.de</u> www.kombitec.de

Technical data-sheet for Workstation HA-XX-xxx

Manufacture:

KombiTec GmbH

An der Römerstr. 1 D-87488 Betzigau

GERMANY

Tel: +49 (0) 831 / 960 398 - 0 Fax: +49 (0) 831 / 960 398 - 10



- this is an exemplary picture and deviates individually -



Tel +49 (0) 831 / 960 398-0 Fax +49 (0) 831 / 960 398-10 E-mail: <u>info@kombitec.de</u> www.kombitec.de

Benefits:

- cost-effectiveness standard solution
- duties and custom combinable
- Extensive installation components available as a "standard" modules
- Standard width: 1.200mm or 1.600mm
- on demand several welding stations from crossbeams with roller conveyors
- Also "ESD"-version available
- suitable for all Kombi Tec's welding heads, welding guns and inverters
- pneumatic-components from Fa. SMC, FESTO or Bosch Rexroth selectable
- With glare bright illumination of the work area
- lighting and sockets separately switchable
- By footrest and chair used as a "seat workstation"
- In combination with small controllers semi- and fully automated
- Optional: with extensions for automated feeding and removal of components
- available as a

Application areas:

Suitable for laboratory-working station for sample-production up to professional equipped, handling-optimised work-station for mass-production

- suitable as a "stand-alone"-solution or as an integrated component in productionchain
- available with "monitored N.i.O.-box"

Technical changes:

Technical modification and price changes without notices. All dimensions are in "mm". No liability can be accepted for printing errors.



Tel +49 (0) 831 / 960 398-0 Fax +49 (0) 831 / 960 398-10 E-mail: <u>info@kombitec.de</u> www.kombitec.de

Technical data:

Main dimension (w/d/h): 1.200mm x 750mm x 1.215mm / 2.230mm

Weight: approx. 40kg – 150kg, add. application

Connection: Current: 220V / 50Hz for lightning


Current: depending to power-source and PLC


pressed air


Environment: Industrial environment, clean, dry, frost-free

Not suitable for EX-environment!

Temperature-range: $0^{\circ}\text{C} - 60^{\circ}\text{C}$

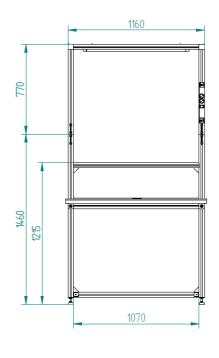





Picture: Dimension Working-station HA-1200 without fixing/ mountings



Tel +49 (0) 831 / 960 398-0 Fax +49 (0) 831 / 960 398-10 E-mail: info@kombitec.de www.kombitec.de

Workstation HA-XX-xxx Option of configuration:

Glare-free illumination **HA-XX-xxx**

Switched outlet in various **National versions selectable** HA-1200-xxx

Arm matched to the powersource HA-XX-xxx

Pneumatic-components from SMC, Festo or Bosch-Rexroth

Workstation in "ESD-version" available

Fixing for all KombiTec-powersources and transformers

